






The components of the products that optimize the recycling performances are listed, identified and located hereunder.

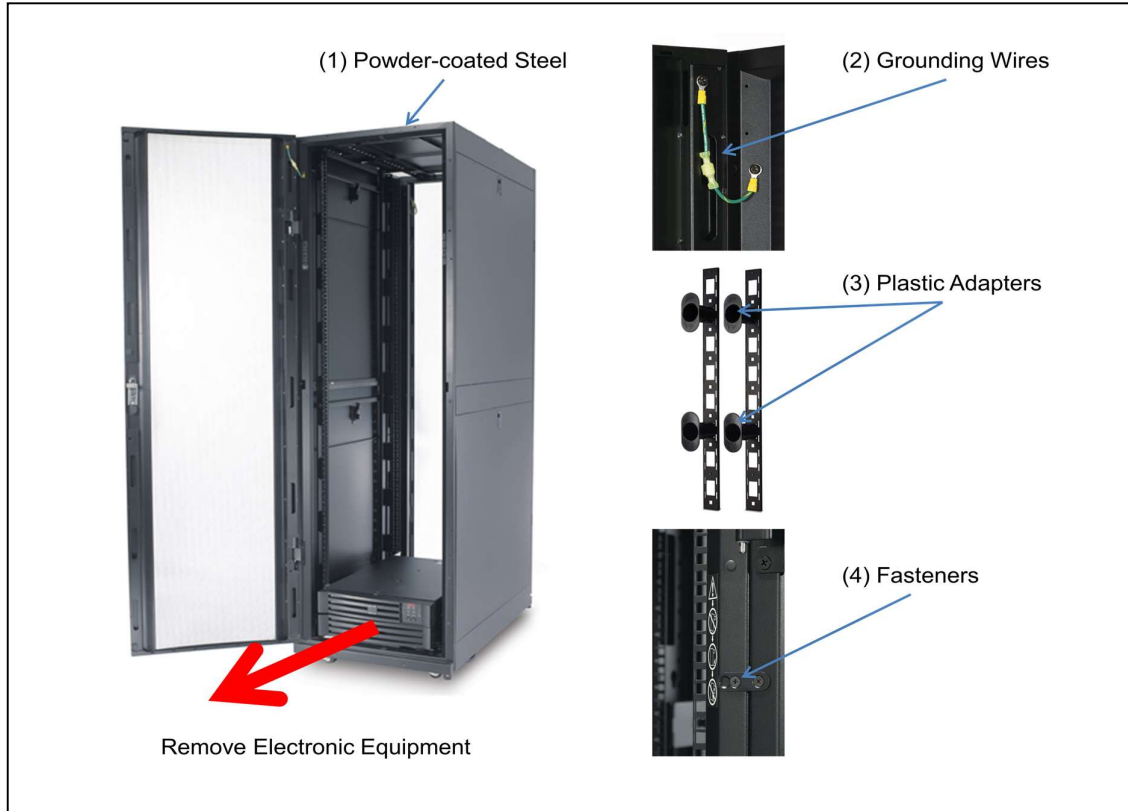

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	(1)	Plated or powder-coated metal rails	500 – 2970 each	Cold Rolled Steel
Special treatment	(2)	Cable	50 – 150 each	Brominated flame retarded (BFR) nylon moulded connectors.

EoLI achieved with Schneider-Electric TT03 V5 procedure

**Schneider Electric Industries SAS**

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)